


No.80 スプロケット

P=25.4m/m(1")

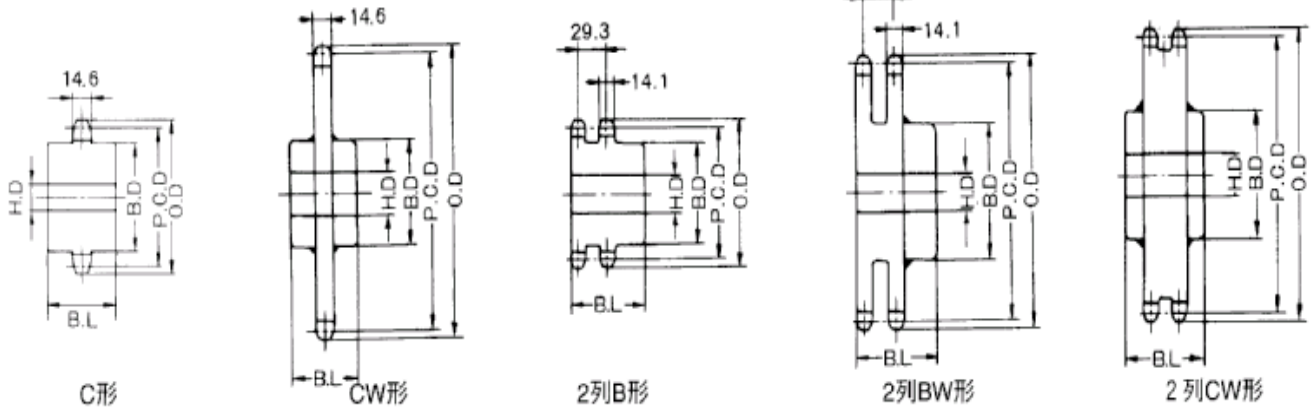

(単位: mm)

歯数	C形・CW形					材質	新B形・2列B形・2列BW形					材質	2列CW形					材質		
	軸穴径HD		ボス		概略重量 kg		軸穴径HD		ボス		概略重量 kg		軸穴径HD		ボス		概略重量 kg			
	最小	最大	径B.D	長さB.L			最小	最大	径B.D	長さB.L			最小	最大	径B.D	長さB.L				
9	16	30	44	50		C形 炭素鋼														
10	16	32	52	50			21	32	52	63	1.80									
11	16	38	60	50			21	38	60	63	2.40									
12	16	45	69	50			23	45	69	63	2.50									
13	16	50	77	50			23	50	77	63	3.10									
14	16	55	85	50			23	55	85	63	3.70									
15	20	63	93	50			23	63	93	63	4.30									
16	20	65	100	50			23	65	100	71	5.50									
17	20	65	100	50			23	65	100	71	6.40									
18	20	80	118	50			23	80	118	71	6.00									
19	20	80	124	50			23	80	124	71	6.40									
20	20	85	130	50		23	85	130	71	7.60										
21	20	85	130	50	4.50	23	85	130	71	7.80										
22	20	60	93	60	4.80	25	80	117	71	8.80		25	75	117	100	11.00				
23	20	60	93	60	5.10	25	80	117	71	9.30		25	75	117	100	11.80				
24	20	60	93	60	5.40	25	80	117	80	10.50		25	75	117	100	12.50				
25	20	60	93	60	5.70	25	80	117	80	11.10		25	75	117	100	13.30				
26	20	60	93	65	6.10	25	80	117	80	11.70		25	75	117	100	14.10				
27	20	60	93	65	6.40	25	80	117	80	12.20		25	75	117	100	14.90				
28	20	60	93	65	6.70	25	80	117	80	13.00		25	75	117	100	15.70				
29	20	60	93	65	7.10	25	80	117	80	13.60		25	75	117	100	16.50				
30	20	60	93	65	7.40	25	80	117	80	14.20		25	75	117	100	17.20				
31	20	60	93	65	7.80	25	80	117	80	15.20		25	75	117	100	17.90				
32	20	60	93	65	8.10	25	80	117	80	16.50		25	75	117	100	18.60				
33	20	60	93	65	8.40	25	80	117	80	17.10		25	75	117	100	19.30				
34	20	60	93	65	8.80	25	80	117	80	17.50		25	75	117	100	20.00				
35	20	60	93	65	9.30	25	80	117	80	17.90		25	80	127	105	23.30				
36	20	60	93	65	9.70	25	80	117	80	18.90		25	80	127	105					
38	20	60	93	65	10.60	25	89	127	80	21.00		25	80	127	105	29.50				
40	20	65	108	70	13.00	25	89	127	90	23.70		25	80	127	105					
42	20	65	108	70	13.90	25	89	127	90	27.20		25	80	127	105					
45	20	65	108	80	15.60	25	89	127	90	28.40		25	80	127	105	36.60				
48	20	65	108	80	17.00	25	89	127	90	32.00		25	80	127	105					
50	20	65	108	80	18.30	25	89	127	90	35.00		25	80	127	105					
54	20	65	108	80	20.70	25	89	127	90	38.50		25	80	127	105	51.60				
60	20	70	118	80	24.90	25	89	127	90	46.20		25	80	127	105	63.20				
65	20	70	118	85	28.60	25	89	127	90	55.00		25	80	127	105					
70	20	70	118	85	32.50	25	89	127	90	65.00		25	80	127	105					
75	20	70	118	85	36.10	25	95	138	90	72.00		25	85	138	105					
80	20	70	118	85	42.10	25	95	138	90	89.00		25	85	138	105					
85	20	70	118	85	44.90							25	85	138	105					
90	20	70	118	85	47.80							25	85	138	105					

⇒ 歯先高周波焼入れ

* CW形全々と2列BW形の歯数22~80のものは溶接タイプ・材質は普通鋼